


Componental specification of plane waves in isotropic and anisotropic viscoelastic media

Vlastislav Červený and Ivan Pšenčík

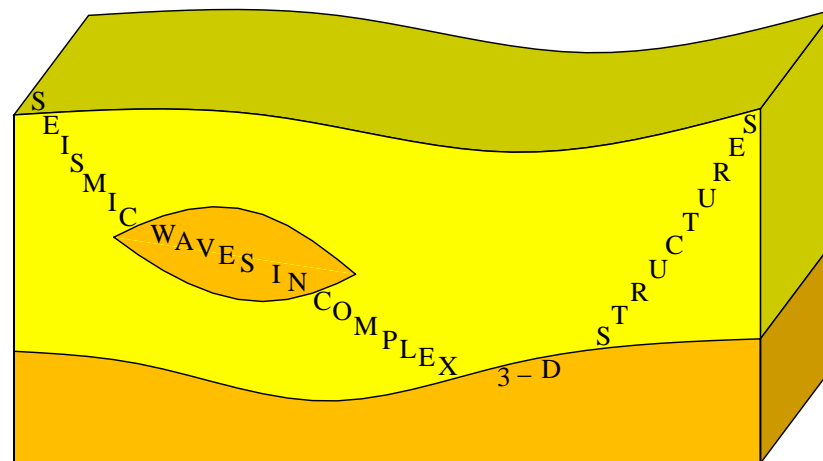

Displacement vector of a harmonic plane wave

$$\mathbf{u}(\mathbf{x}, t) = a\mathbf{U} \exp(-i\omega(t - \mathbf{p} \cdot \mathbf{x}))$$

\mathbf{u} - displacement vector

\mathbf{x} - position vector

t - time

ω - circular frequency

a - scalar amplitude factor

\mathbf{U} - normalized polarization vector ($\mathbf{U} \cdot \mathbf{U} = 1$)

\mathbf{p} - slowness vector

Slowness vector (generally complex valued)

$$\mathbf{p} = \mathbf{P} + i\mathbf{A}$$

\mathbf{P} - propagation vector, \mathbf{A} - attenuation vector

Attenuation angle γ

$$\cos \gamma = \mathbf{P} \cdot \mathbf{A} / |\mathbf{P}| |\mathbf{A}|$$

$\gamma = \mathbf{0}$ - homogeneous wave

$\gamma \neq \mathbf{0}$ - inhomogeneous wave

Some choices of \mathbf{P} and \mathbf{A} nonphysical (forbidden directions)

Two specifications of the slowness vector

Componental and mixed specifications

- avoid problems with "forbidden directions"
- obtained by solving polynomial equation of 6th degree

Componental specification

- useful for study of R/T problems
- problems with selection of signs of complex square roots

Mixed specification

- useful in unbounded media
- no problems with selection of signs of complex square roots

Componental specification of slowness vector

$$\mathbf{p} = \sigma^\Sigma \mathbf{n}^\Sigma + \mathbf{p}^\Sigma, \quad \mathbf{n}^\Sigma \cdot \mathbf{p}^\Sigma = 0$$

\mathbf{n}^Σ - unit normal to Σ (given; real valued)

\mathbf{p}^Σ - projection of \mathbf{p} to Σ (given; complex valued)

each combination of \mathbf{n}^Σ and \mathbf{p}^Σ specifies uniquely an existing plane wave

σ^Σ - complex-valued scalar to be determined

Determination of the complex-valued scalar

$$\det[a_{ijkl}(\sigma^\Sigma n_j^\Sigma + p_j^\Sigma)(\sigma^\Sigma n_l^\Sigma + p_l^\Sigma) - \delta_{ik}] = 0 \quad (*)$$

(*) - polynomial equation of the 6th degree

for complex-valued σ^Σ

a_{ijkl} - density-normalized elastic or viscoelastic moduli

Mixed specification of slowness vector

$$\mathbf{p} = \sigma \mathbf{n} + iD\mathbf{m}, \quad \mathbf{n} \cdot \mathbf{m} = 0, \quad \mathbf{n} \parallel \mathbf{P} \quad (\mathbf{p}^\Sigma = iD\mathbf{m})$$

\mathbf{n}, \mathbf{m} - unit vectors (given; real valued)

D - inhomogeneity parameter (given; real valued)

each combination of \mathbf{n}, \mathbf{m} and D specifies uniquely an existing plane wave

σ - complex-valued scalar to be determined

$D = 0$ - homogeneous wave $D \neq 0$ - inhomogeneous wave

Determination of the complex-valued scalar

$$\det[a_{ijkl}(\sigma n_j + iDm_j)(\sigma n_l + iDm_l) - \delta_{ik}] = 0 \quad (*)$$

(*) - polynomial equation of the 6th degree

for complex-valued σ

a_{ijkl} - density-normalized elastic or viscoelastic moduli

Componental versus mixed specifications

Componental \rightarrow mixed: $\mathbf{p} = \sigma^\Sigma \mathbf{n}^\Sigma + \mathbf{p}^\Sigma \rightarrow \mathbf{p} = \sigma \mathbf{n} + iD\mathbf{m}$

$$\mathbf{n} = \mathbf{P}/|\mathbf{P}|, \quad \sigma = (\sigma^\Sigma \mathbf{n}^\Sigma + \mathbf{p}^\Sigma) \cdot \mathbf{n}$$

$$\mathbf{m} = \text{Im}(\sigma^\Sigma \mathbf{n}^\Sigma - \sigma \mathbf{n} + \mathbf{p}^\Sigma) / |\text{Im}(\sigma^\Sigma \mathbf{n}^\Sigma - \sigma \mathbf{n} + \mathbf{p}^\Sigma)|$$

$$D = |\text{Im}(\sigma^\Sigma \mathbf{n}^\Sigma - \sigma \mathbf{n} + \mathbf{p}^\Sigma)|$$

Componental versus mixed specifications

Mixed \rightarrow componental: $\mathbf{p} = \sigma \mathbf{n} + iD\mathbf{m} \rightarrow \mathbf{p} = \sigma^\Sigma \mathbf{n}^\Sigma + \mathbf{p}^\Sigma$

\mathbf{n}^Σ - unit normal to Σ

$$\sigma^\Sigma = (\sigma \mathbf{n} + iD\mathbf{m}) \cdot \mathbf{n}^\Sigma$$

$$\mathbf{p}^\Sigma = \sigma \mathbf{n}^\Sigma - \sigma^\Sigma \mathbf{n}^\Sigma + iD\mathbf{m}$$

R/T in anisotropic viscoelastic media

Incident wave: $\mathbf{p} = \sigma \mathbf{n} + iD\mathbf{m}$

$$\det[a_{ijkl}^{inc}(\sigma n_j + iDm_j)(\sigma n_l + iDm_l) - \delta_{ik}] = 0$$

Generated wave: $\mathbf{p}^g = \sigma^g \mathbf{n}^\Sigma + \mathbf{p}^\Sigma$

$$\mathbf{p}^\Sigma = \sigma \mathbf{N}^\Sigma + iD\mathbf{M}^\Sigma$$

$$\mathbf{N}^\Sigma = \mathbf{n}^\Sigma \times (\mathbf{n} \times \mathbf{n}^\Sigma), \quad \mathbf{M}^\Sigma = \mathbf{n}^\Sigma \times (\mathbf{m} \times \mathbf{n}^\Sigma)$$

$$\det[a_{ijkl}^g(\sigma^g n_j^\Sigma + p_j^\Sigma)(\sigma^g n_l^\Sigma + p_l^\Sigma) - \delta_{ik}] = 0$$

Studied special cases

- special choices of \mathbf{p}^Σ :

 - real valued, imaginary valued, $\text{Imp}\mathbf{p}^\Sigma \parallel \text{Rep}\mathbf{p}^\Sigma$, etc

- special cases of media:

 - isotropic viscoelastic, monoclinic viscoelastic, etc

- types of waves:

 - P and S, SH, inhomogeneous, homogeneous, etc